

Matrox X.mio3 FH

Multi-channel SDI card with hardware-based processing

Matrox X.mio3 FH features re-configurable multi-channel SD, HD, 3G and 4K SDI I/O, AES/EBU, LTC, GPIO with advanced hardware-based processing in a single half-length PCI express card. This card is supported by the Matrox DSX SDK (Software Development Toolkit). Please refer to the Matrox DSX Developer Products datasheet for information on file I/O, software codecs and CPU effects



Key features

- Half-length PCI express card
- Re-configurable I/O that can support up to 12 SDI inputs or outputs
- Frame synchronizers
- VANC and HANC support for each input and output
- Analog blackburst reference input (tri-level or bi-level)
- On-board multi-channel MADi (Motion Adaptive De-Interlacer)
- On-board multi-channel Up/Down/Cross scaler
- On-board multilayer compositor
- Automatic video relay bypass
- Live zero-frame delay video and audio mixers
- Up to 16 channels of AES/EBU inputs and outputs
- Up to 8 LTC inputs and outputs
- RS422 control
- Single slot all inclusive option

System bus interface

- Single-slot PCI express Gen2 x8 bus
- Allows for multiple cards in a system
- Single slot all inclusive SDI, AES/EBU and LTC option

Digital video inputs and outputs

- Reconfigurable inputs and outputs
- Serial digital component 4:2:2 video at 270 Mbps in accordance with SMPTE ST 259M (SD)
 - 480i (NTSC) at 29.97 fps
 - 576i (PAL) at 25 fps
- Serial digital component 4:2:2 video at 1.5 Gbps in accordance with SMPTE ST 292M (HD)
 - 1080i at 25, 29.97, and 30 fps
 - 720p at 50, 59.94, and 60 fps
 - 1080p/PsF at 23.98, 24, 25, 29.97, and 30 fps
- 3G SDI in accordance with SMPTE ST 424M and SMPTE ST 425M-AB
 - 1080p-at 50, 59.94, and 60 fps
 - 8 and 10-bit YUV 4:2:2
- Up to 12 10-bit 4:2:2 serial digital video inputs/outputs
 - Up to 8 10-bit 4:2:2 serial digital video inputs
 - Up to 8 10-bit 4:2:2 serial digital video outputs
- SDI inputs and outputs can be a video or key, where key inputs and outputs can be expanded and inverted
- UHD (Ultra HD) inputs and outputs
 - 3840x2160p at 59.94, 50, and 60 (Quad mode and SMPTE ST 425-5 Level A)
 - 3840x2160p at 29.97, 25, 24, and 23.98
- Simultaneous input and output of different video standards
- Auto-detection of input video standard
- Video relay bypass for 4 inputs
- Independent horizontal and vertical timing presets for each video output
- Generic support of VANC
- Support for HANC packets (SMPTE ST 12M-2 and SMPTE ST 352)
- Proc amp controls at inputs

Built-in frame synchronizers

- Up to 8 frame synchronizers
- Corrects timebase of inputs to the genlock source
- 16 channels of audio resampling per input
- Can be optionally disabled

Motion Adaptive Deinterlacer

- Pixel based operation
- Temporal and spacial-based motion estimation
- Anti-Aliasing filtering
- Telecine detection and film restoration
- Video over film detection
- Up to 4 channels of 1080i30 to 4 channels of 1080p60 processing
- 10-bit processing

Onboard scaler

- Pixel-based scaling, positioning, and cropping
- Down, up and cross scaling
- Downscaling of up to 8 channels of 1080i30
- Cross scaling of up to 4 channels of 1080i30
- Supports custom resolutions and broadcast resolutions up to UHD
- 8- and 10-bit surfaces
- YUV 4:2:2 and YUVA 4:2:2:4 surface formats
- Aspect ratio and colorimetry conversion between SD and HD
- Ancillary data conversion between SD and HD

Onboard compositor

- Programmable in single or multiple compositor configurations
- 8- and 10-bit video
- Up to 8 layers of 1080i30 compositing or 2 layers of UHDp60 compositing
- Full-blend and half-blend mixing
- Shaped or unshaped video compositing
- RGBA to YUVA color space conversion
- Logo input support with pixel-based positioning

In-line live video and audio mixers

- Up to 4 live mixers
- Zero frame delay
- 8- and 10-bit video
- Downstream mixing of live video with host buffers
- Mixing of 16 tracks of live audio with host audio

- Analog blackburst reference (tri-level or bi-level) or SDI input as reference
- Optional latching termination
- VITC support on blackburst (SMPTE ST 318M-A)
- Auto detection of genlock standard

Embedded audio inputs and outputs

- Supports up to 16 channels of embedded audio per SDI video stream in accordance with SMPTE ST 272M A, B, and C (SD) and SMPTE ST 299M (HD)
- 48 kHz sampling
- Supports 16-, 20-, and 24-bit audio streams

- 16-in/16-out unbalanced AES/EBU audio channels
- 48 kHz sampling
- 16-, 20-, and 24-bit audio streams are supported

LTC

- up to 8 unbalanced LTC inputs in accordance with SMPTE ST 12M-1
- up to 8 unbalanced LTC outputs in accordance with SMPTE ST 12M-1


RS422

- Serial interface control

GPIO Interface

- Active or Opto-coupled options
- 6 inputs, 2 outputs
(other configurations available on request)

Matrox X.mio3 FH (8 inputs and 4 outputs configuration)

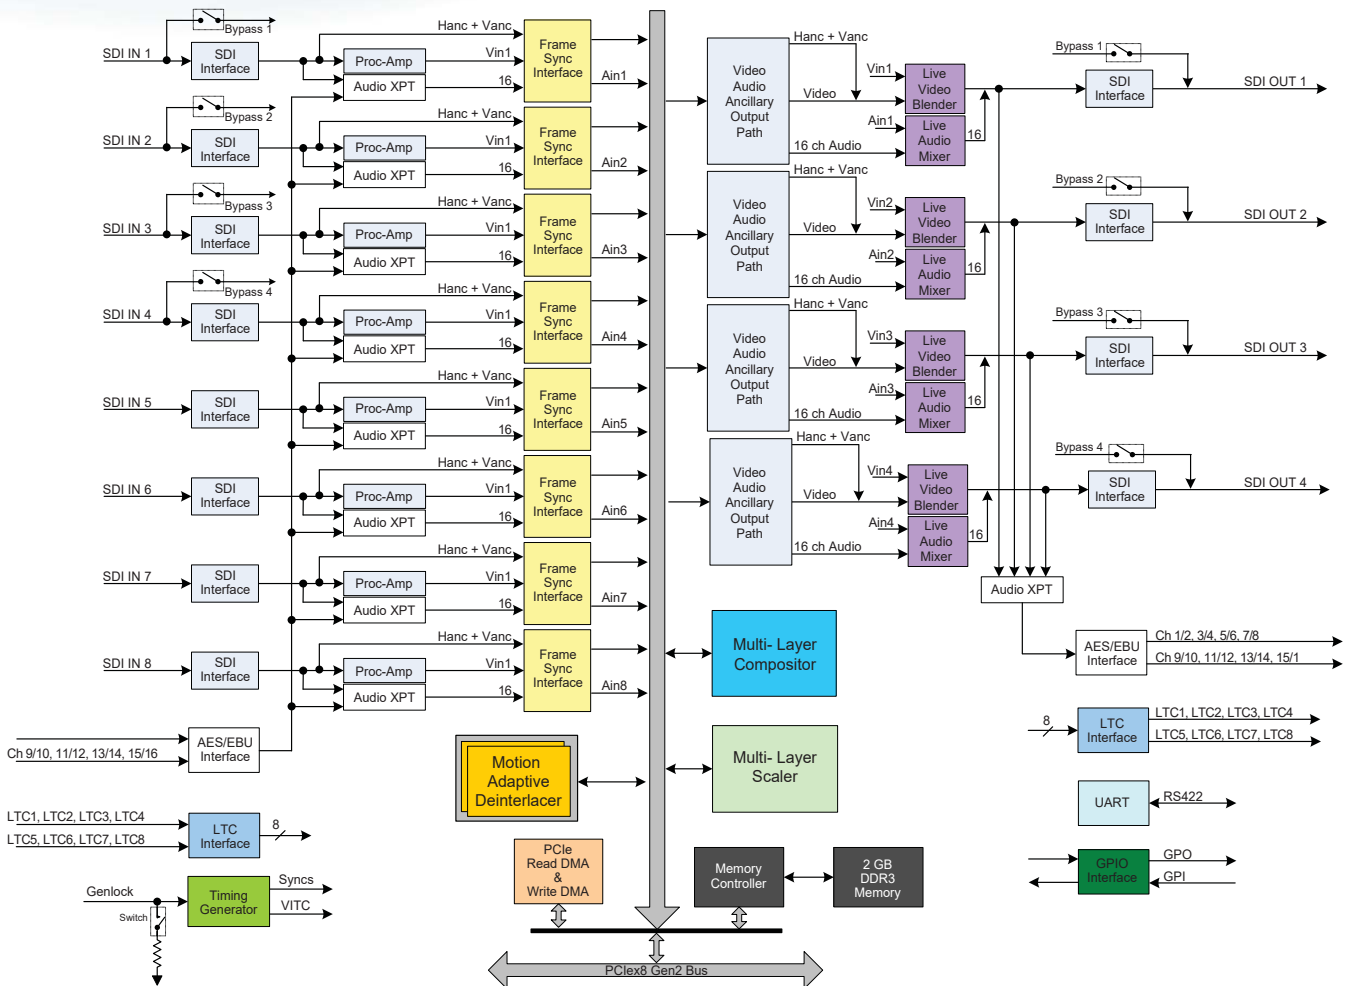

www.matrox.com/video

Corporate Headquarters— Matrox Video Products Group
 Tel: (514) 822-6364, (800) 361-4903 (North America) Fax: (514) 685-2853
 E-mail: video.info@matrox.com

matrox[®]
 Digital Video Solutions

Any particular application may or may not take advantage of all the Matrox DSX features described in this brochure. Matrox Electronic Systems Ltd. reserves the right to make changes in specifications at any time and without notice. The information provided by this document is believed to be accurate and reliable. However, no responsibility is assumed by Matrox Electronic Systems Ltd. for its use; nor for any infringements of patents or other rights of third parties resulting from its use. No license is granted under any patents or patent rights of Matrox Electronic Systems Ltd. Matrox makes no warranties, express or implied, with respect to the performance of third party products described herein. Matrox and Matrox DSX are registered trademarks and Matrox X.AVCIo, Matrox X.open, Matrox X.io, Matrox X.LinkSD, Matrox X.LinkHD, Matrox X.Effects, Matrox X.scaler, Matrox X.mio, Matrox X.mio2, Matrox X.DVI and Matrox X.RIO are trademarks of Matrox Electronic Systems Ltd. Inc. Other product names mentioned in this document may be registered trademarks or trademarks of other companies. Printed in Canada, September 2015